


Ex:

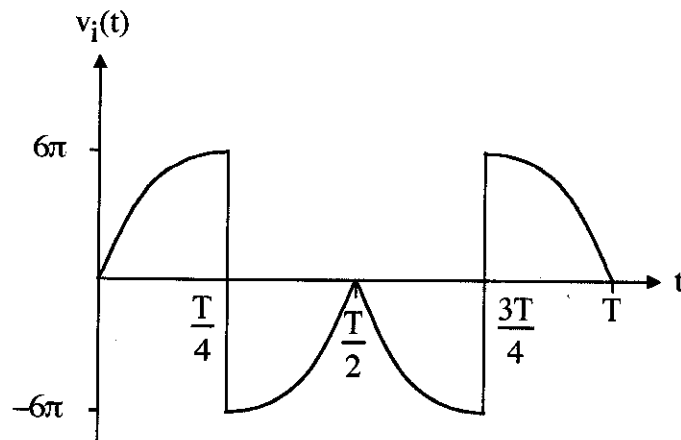

$T = \text{one period of } v_i(t) = 2\pi/60 \text{ s}$

$$v_i(t) = \begin{cases} 6\pi \sin(\omega_0 t) \text{ V} & 0 < t \leq T/4 \\ -6\pi \sin(\omega_0 t) \text{ V} & T/4 < t \leq T/2 \\ 6\pi \sin(\omega_0 t) \text{ V} & T/2 < t \leq 3T/4 \\ -6\pi \sin(\omega_0 t) \text{ V} & 3T/4 < t \leq T \end{cases}$$

Find numerical values of coefficients a_v , a_1 , a_2 , b_1 , and b_2 for the Fourier series for $v_i(t)$:

$$v_i(t) = a_v + \sum_{k=1}^{\infty} a_k \cos(k\omega_0 t) + b_k \sin(k\omega_0 t)$$

Sol'n: Because $v_i(t)$ has equal area above and below 0V, the average value of $v_i(t)$ is zero:

$$a_v = 0 \text{ V}$$

Since $v_i(t)$ is periodic, it consists of copies of the above waveform repeating to the left and right.

If we reflect $v_i(t)$ about the vertical axis, we obtain $v_i(t)$. Thus, $v_i(t) = v_i(-t)$ and $v_i(t)$ is an even function.

$$\therefore b_k = 0V \text{ for all } k$$

$$b_1 = 0V \text{ and } b_2 = 0V$$

If we shift $v_i(t)$ right (or left) by one-half period and then flip it upside down, we obtain $v_i(t)$. Thus, $v_i(t)$ has shift flip symmetry and even numbered Fourier coefficients are zero.


$$\therefore a_k = 0V \text{ for all even } k$$

$$a_2 = 0V$$

That leaves us with the calculation of a_1 :

$$a_1 = \frac{2}{T} \int_0^T v_i(t) \cos(1 \cdot \omega_0 t) dt$$

A sketch of $v_i(t)$, $\cos(\omega_0 t)$, and $v_i(t)\cos(\omega_0 t)$ reveals how the calculation of a_1 reduces to the computation of a single integral.

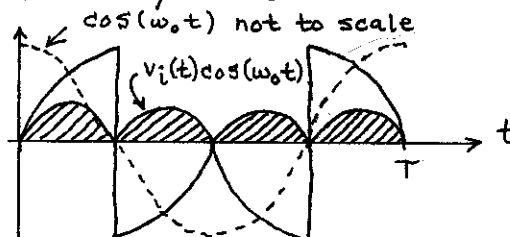

From the sketch, it is apparent that four times the integral from 0 to $T/4$ of $v_i(t) \cos(\omega_0 t)$, (i.e., the hatched area), gives the value of a_1 :

$$a_1 = 4 \cdot \frac{2}{T} \int_0^{T/4} v_i(t) \cos(\omega_0 t) dt \quad V$$

$$= \frac{8}{T} \int_0^{T/4} 6\pi \sin(\omega_0 t) \cos(\omega_0 t) dt \quad V$$

$$= \frac{8}{T} \cdot 6\pi \int_0^{T/4} \frac{\sin(2\omega_0 t)}{2} dt \quad V$$

$$a_1 = \frac{24\pi}{T} \int_0^{T/4} \sin(2\omega_0 t) dt \quad V$$

The fundamental frequency, ω_0 , is given by

$$\omega_0 = \frac{2\pi}{T}.$$

We may choose any convenient value for T without changing the value of Fourier coefficients.

For convenience, we might set $T=2\pi$, for example. This simplifies the calculation. On the other hand, retaining T as a symbolic variable allows us to verify that all the factors of T cancel out. This is a convenient consistency check.

$$\begin{aligned}
 a_1 &= \frac{24\pi}{T} \cdot \frac{-\cos(2\omega_0 t)}{2\omega_0} \bigg|_0^{T/4} V \\
 &= \frac{24\pi}{T} \cdot \frac{-\cos\left(2 \cdot \frac{2\pi}{T} \cdot \frac{T}{4}\right) - (-\cos(0))}{2 \cdot \frac{2\pi}{T}} V \\
 &= 6 [1 - \cos(\pi)] V \\
 &= 6 [1 - (-1)] V
 \end{aligned}$$

$$a_1 = 12V$$

Note: Sketches illustrate why a_2 , b_1 , and b_2 are zero.

