
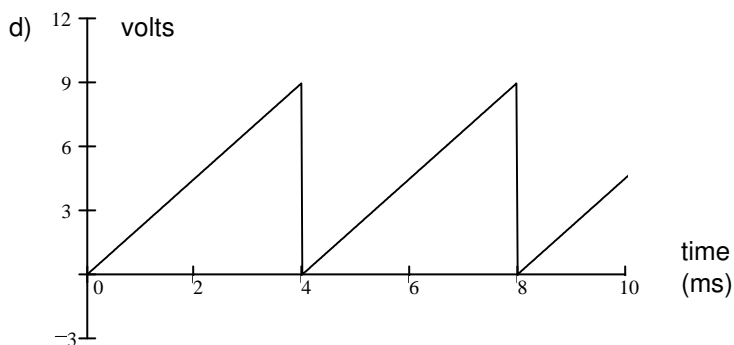
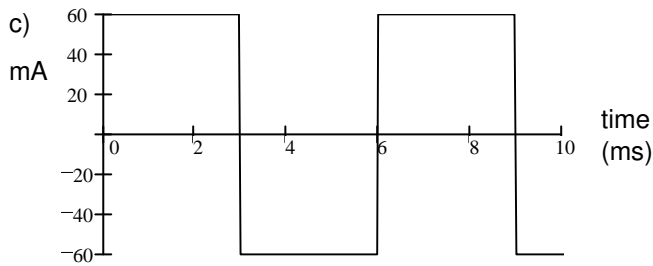
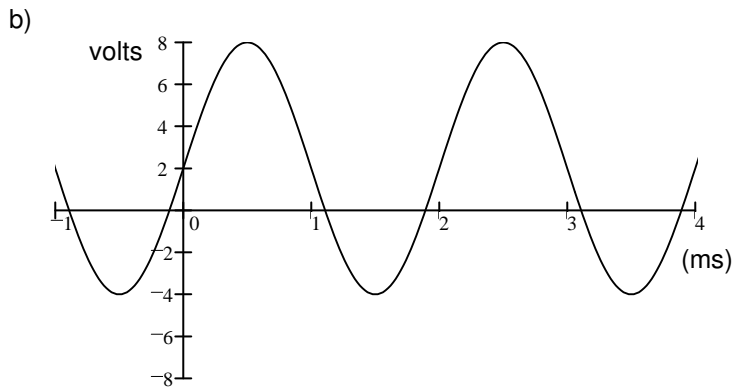



1. For each of the following waveforms, find:  
 1) Average DC ( $V_{DC}$ , or  $I_{DC}$ ) value  
 2) RMS (effective) value

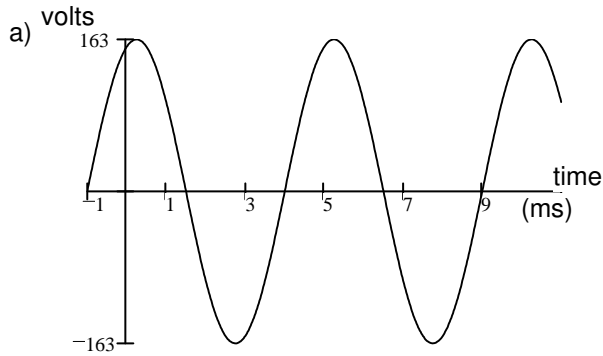

ECE 3600 Hw 3A p2

2. For waveform shown, find:


- a) Rectified average ( $V_{RA}$ ) value
- b) RMS (effective) value

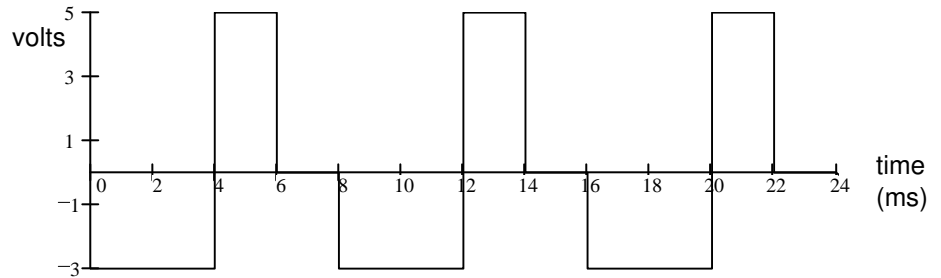

3. Compute the power factor for an inductive load consisting of  $L := 20 \cdot \text{mH}$  and  $R := 6 \cdot \Omega$  in series.  $\omega := 377 \cdot \frac{\text{rad}}{\text{s}}$

4. The complex power consumed by a load is  $620 \angle 29^\circ \text{ VA}$ . Find:

- a) Apparent power (as always, give the correct units).
- b) Real power.
- c) Reactive power.
- d) Power factor.
- e) Is the power factor leading or lagging?
- f) Draw a phasor diagram.

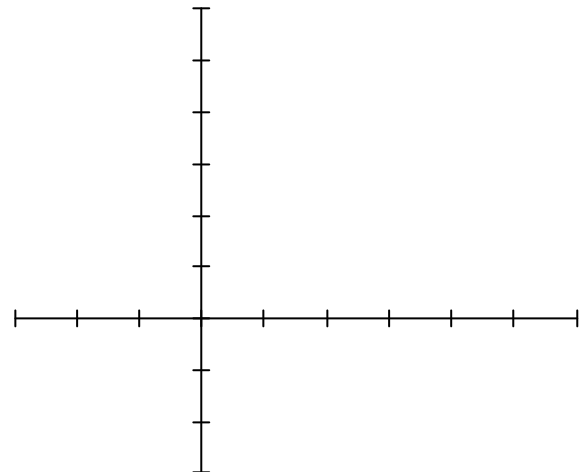

**Answers**

- 1. a)  $0 \cdot \text{V}$      $115 \cdot \text{V}$     b)  $2 \cdot \text{V}$      $4.69 \cdot \text{V}$
- c)  $0 \cdot \text{mA}$     $60 \cdot \text{mA}$    d)  $4.5 \cdot \text{V}$     $5.2 \cdot \text{V}$
- 2. a)  $2.75 \cdot \text{V}$     b)  $3.28 \cdot \text{V}$
- 3. pf := 0.623

- 4. a)  $620 \cdot \text{VA}$     b)  $542 \cdot \text{W}$     c)  $301 \cdot \text{VAR}$
- d) 0.875    e) lagging

