
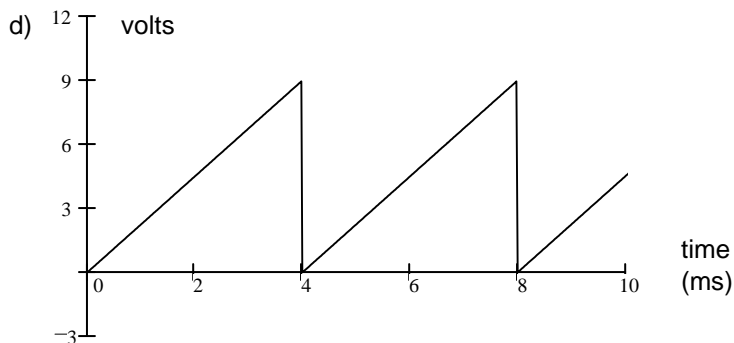
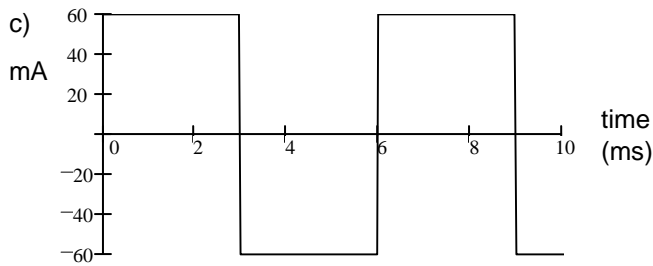
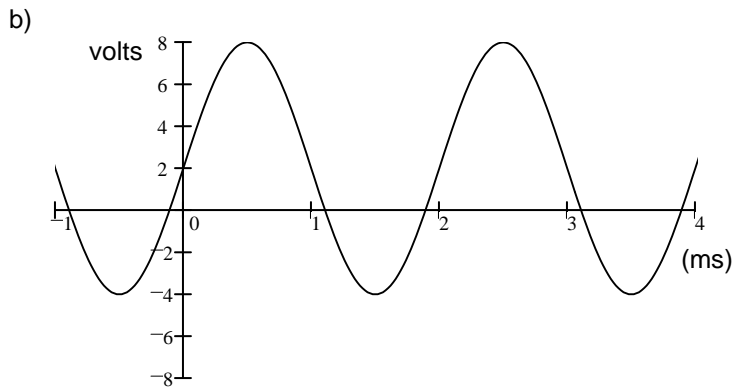


1. For each of the following waveforms, find:


- 1) Average DC (V_{DC} , or I_{DC}) value
- 2) RMS (effective) value

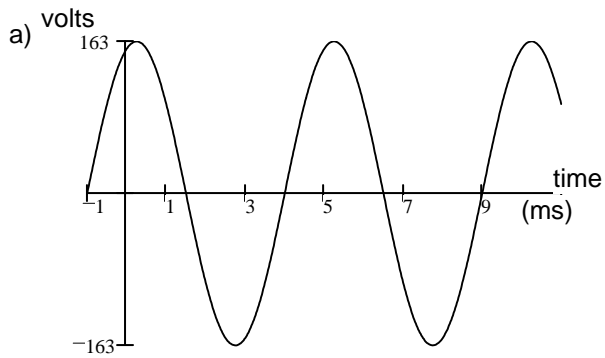

ECE 3600 Hw 3A p2

2. For waveform shown, find:


- a) Rectified average (V_{RA}) value
- b) RMS (effective) value

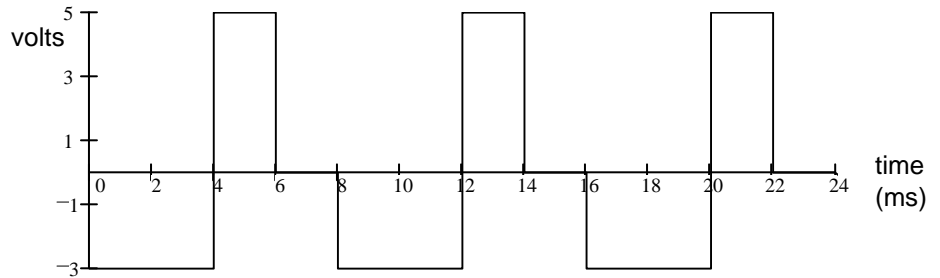

3. Compute the power factor for an inductive load consisting of $L := 20 \cdot \text{mH}$ and $R := 6 \cdot \Omega$ in series. $\omega := 377 \cdot \frac{\text{rad}}{\text{s}}$

4. The complex power consumed by a load is $620 \angle 29^\circ \text{ VA}$. Find:

- a) Apparent power (as always, give the correct units).
- b) Real power.
- c) Reactive power.
- d) Power factor.
- e) Is the power factor leading or lagging?
- f) Draw a phasor diagram.

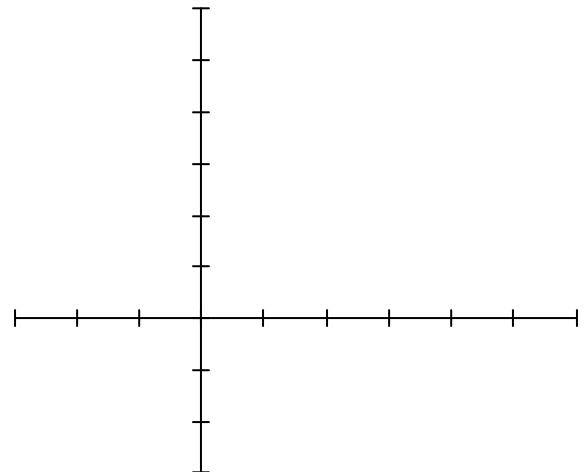

Answers

- 1. a) $0 \cdot \text{V}$ $115 \cdot \text{V}$ b) $2 \cdot \text{V}$ $4.69 \cdot \text{V}$
- c) $0 \cdot \text{mA}$ $60 \cdot \text{mA}$ d) $4.5 \cdot \text{V}$ $5.2 \cdot \text{V}$
- 2. a) $2.75 \cdot \text{V}$ b) $3.28 \cdot \text{V}$
- 3. pf := 0.623

- 4. a) $620 \cdot \text{VA}$ b) $542 \cdot \text{W}$ c) $301 \cdot \text{VAR}$
- d) 0.875 e) lagging

